

BEST PRICE AND QUALITY FOR FAST REPLACEMENT

We offer customers the best value for money with a wide range of LED bulbs and luminaires.

**MASTERING
LIGHT.**






MAZDA LIGHTING: A BIG STEP AHEAD – AND NOT JUST IN SAVINGS.

MAZDA lighting offers you the best possible price-performance ratio with an extended warranty on all products and an average lifetime (L70) of 50,000 hours.

CONTENTS

- 4 DOWNLIGHTS
- 5 FLOODLIGHTS
- 6 PANELS
- 7 HIGH-BAY LUMINAIRES
- 8 OUTDOOR LUMINAIRES
- 10 LED BULBS
- 11 LED CANDLES AND LUSTERS
- 12 LED SPOT GU10/MR16
- 13 LED TUBE T8

DOWNLIGHTS

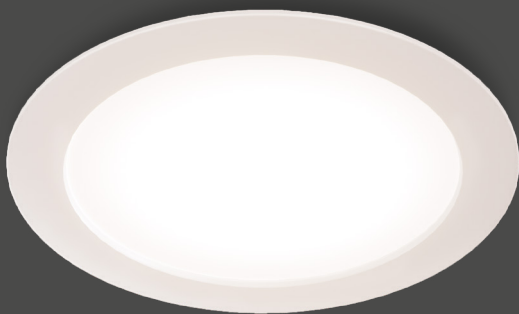

- For homes, retail outlets and hallways

Flat downlight / easy to install

Average lifetime L70: 35,000 hours
- Available in 3000K and 4000K

Available in 150mm and 200mm diameter

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
DN020B LED12/830 13W 220-240V D150	13 W	1.150 lm	88 lm/W	3000 K	8710163544045
DN020B LED12/840 13W 220-240V D150	13 W	1.200 lm	92 lm/W	4000 K	8710163544069
DN020B LED20/830 20W 220-240V D200	20 W	1.900 lm	95 lm/W	3000 K	8710163544106
DN020B LED20/840 20W 220-240V D200	20 W	2.000 lm	100 lm/W	4000 K	8710163544120



IP65

IK02

Temperature
-20 to 40 °C



FLOODLIGHTS



For public spaces, sports facilities, industrial areas, façades, car parks, construction sites

Complete with mounting accessories: ceiling bracket with screws and dowels

Average lifetime L70: 35,000 hours

Version with motion detector (MDU) available

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
BVP008 10W 4000K	10 W	950 lm	95 lm/W	3000 K	8719514533226
BVP008 20W 4000K	20 W	1.900 lm	95 lm/W	4000 K	8719514533219
BVP008 20W 4000K MDU	20 W	1.900 lm	95 lm/W	3000 K	8719514534551
BVP008 50W 4000K	50 W	4.750 lm	95 lm/W	4000 K	8719514533196
BVP008 50W 4000K MDU	50 W	4.750 lm	95 lm/W	4000 K	8719514534537



IP65

IK06

Temperature
-20 to 50 °C



PANEL



For offices, healthcare facilities and schools

Available in sizes 60x60 cm and 120x30 cm

OC versions = Office Compliant (UGR<19)

Easy to install with included connector

Average lifetime L80: 50,000 hours

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
RC009B 34S/ 840 PSU W30L120 NOC	28 W	3.400 lm	120 lm/W	3000 K	8720169517677
RC009B 34S/ 840 PSU W30L120 OC	28 W	3.400 lm	120 lm/W	4000 K	8720169517660
RC009B 34S/ 840 PSU W60L60 NOC	28 W	3.400 lm	120 lm/W	4000 K	8720169517646
RC009B 34S/ 840 PSU W60L60 OC	28 W	3.400 lm	120 lm/W	4000 K	8720169517639



HIGH-BAY LUMINAIRE



- For warehouses and production facilities
- IP65 connector included
- Average lifetime L80: 50,000 hours
- Three lumen levels available

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
BY009P 140S/840 PSU WB	100 W	14.000 lm	140 lm/W	4000 K	8719514530614
BY009P 210S/840 PSU WB	150 W	21.000 lm	140 lm/W	4000 K	8719514530621
BY009P 280S/840 PSU WB	200 W	28.000 lm	140 lm/W	4000 K	8719514530638




IP65

IK06

Temperature
-40 to 50 °C



OUTDOOR LUMINAIRE

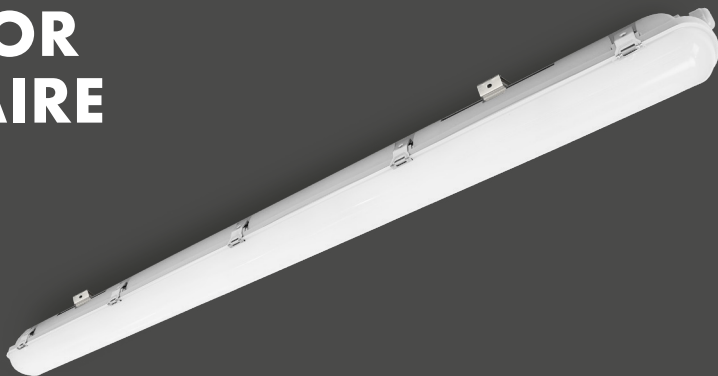

- For car parks, warehouses, and bicycle sheds
- Average lifetime L70: 50,000 hours
- Fast, easy installation
- L1200 / L1500: two Lumen packages per luminaire


PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
WT009C 36S/840 PSU L1200	30 W	3.600 lm	120 lm/W	4000 K	8719514529908
WT009C 56S/840 PSU L1500	46 W	5.600 lm	120 lm/W	4000 K	8719514529922
WT009C 74S/840 PSU L1500	51 W	7.400 lm	137 lm/W	4000 K	8719514529946



IP65

IK08

Temperature
-20 to 40°C

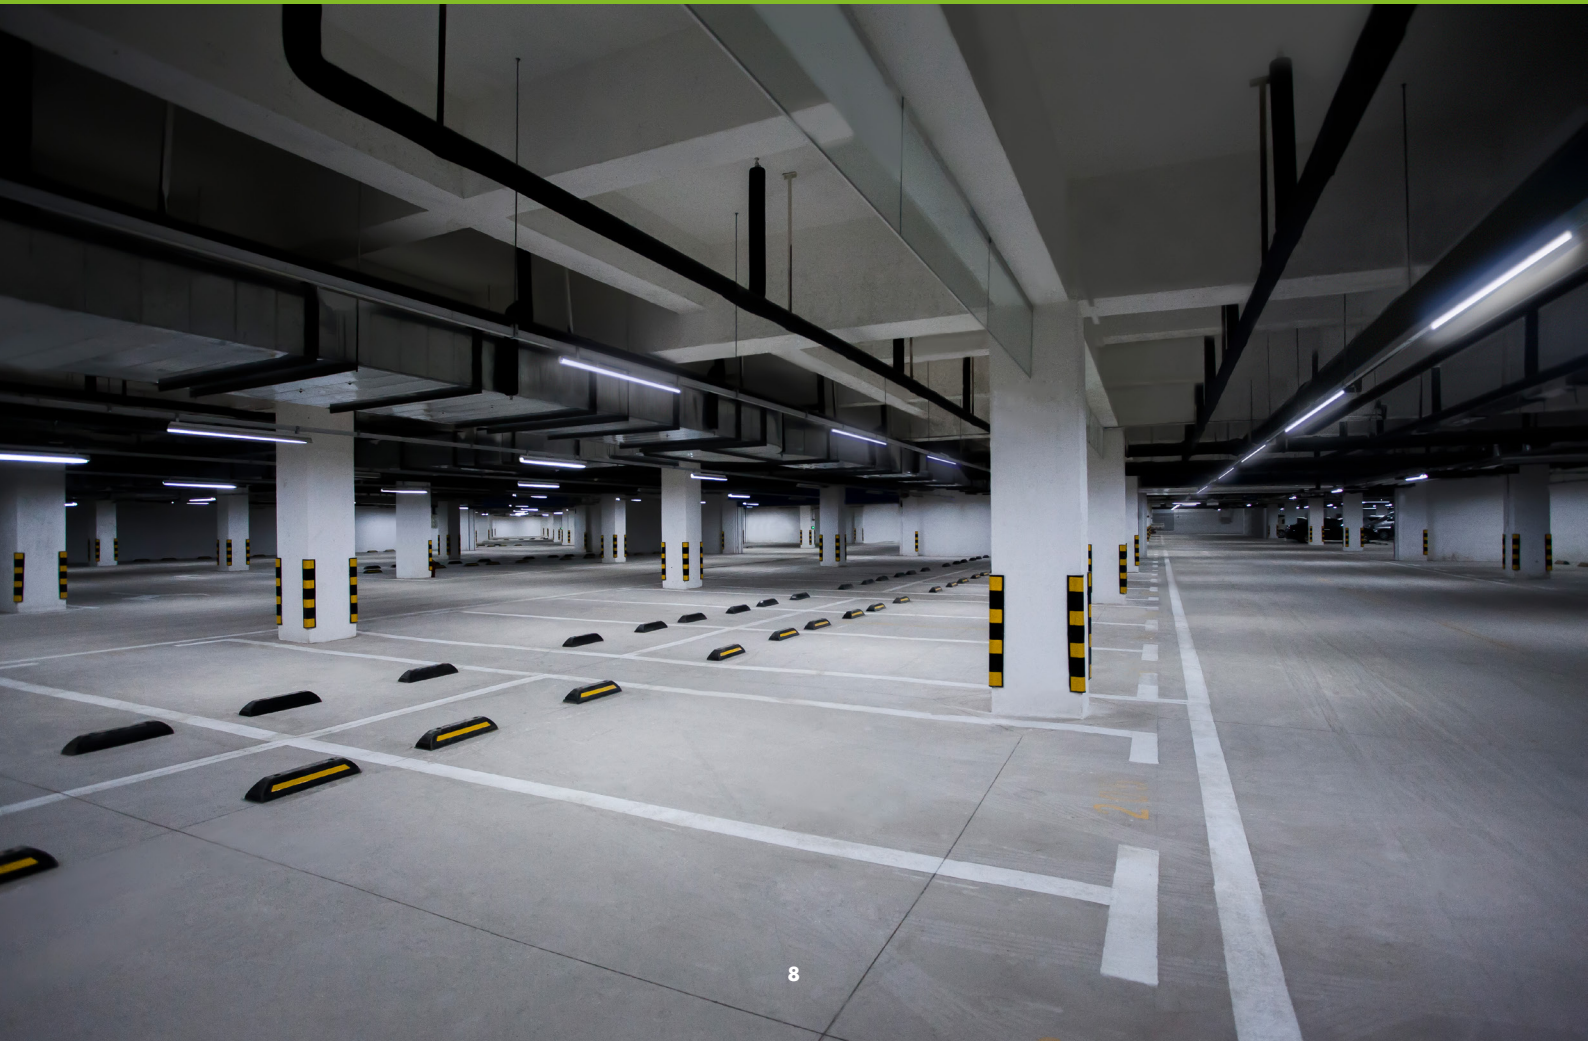

LED: SHORT FOR 'ENERGY SAVINGS'.

In developing our range, we have utilized the latest LED technology to ensure excellent light quality, long life, and high efficiency for instant energy savings. Our wide range of luminaires offers solutions for numerous indoor and outdoor applications. These include car parks garages, construction sites, hallways, sports facilities, and industrial facilities.

LED BULBS



Excellent replacement for 40W, 60W, 75W and 100W incandescent bulbs

Up to 80% energy savings

Warm light 2700K

Non-dimmable

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
LED 40W A60 E27 827 FR ND 1CT/6	4.9 W	470 lm	95 lm/W	2700 K	8710163540511
LED 60W A60 E27 827 FR ND 1CT/6	8 W	806 lm	100 lm/W	2700 K	8710163540573
LED 75W A60 E27 827 FR ND 1CT/6 G3	10 W	1.055 lm	105 lm/W	2700 K	8710163540931
LED 100W A60 E27 WW FR ND 1CT/6	13 W	1.521 lm	117 lm/W	2700 K	8710163540450

LED CANDLES



Excellent replacement for 25W and 40W candle bulbs

Up to 80% energy savings

Non-dimmable

Warm light 2700K

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
LED 25W E14 827 B35 FR ND 1CT/10	3 W	250 lm	83 lm/W	2700 K	8710163541372
LED 40W B35 E14 WW FR ND 1CT/10	14.9 W	470 lm	95 lm/W	2700 K	8710163541396

LED LUSTERS



Excellent replacement for 25W and 40W ball bulbs

Up to 80% energy savings

Non-dimmable

Warm light 2700K

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
LED 25W E14 827 P45 FR ND 1CT/10	2.8 W	250 lm	89 lm/W	2700 K	8710163542539
LED 25W E27 827 P45 FR ND 1CT/10	2.8 W	250 lm	89 lm/W	2700 K	8710163542553
LED 40W P45 E14 WW FR ND 1CT/10	4.9 W	470 lm	95 lm/W	2700 K	8710163543222
LED 40W P45 E27 WW FR ND 1CT/10	4.9 W	470 lm	95 lm/W	2700 K	8710163543000

LED SPOT GU10/ MR16



Excellent replacement for 50W halogen lamps

Up to 80% energy savings

Non-dimmable

Warm light 2700K


Warm light 2700K and 3000K

GU10 and MR16

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
LED 50W GU10 827 36D ND 1CT/10	4.7 W	380 lm	80 lm/W	2700 K	8710163541495
LED 50W GU10 830 60D ND 1CT/10	4.7 W	345 lm	73 lm/W	3000 K	3139188161276
LED 50W GU5.3 827 12V 36D ND 1CT/10	6.5 W	621 lm	95 lm/W	2700 K	8710163540719
LED 50W GU5.3 830 12V 60D ND 1CT/10	6.5 W	621 lm	95 lm/W	3000 K	8710163540672



LED TUBE T8

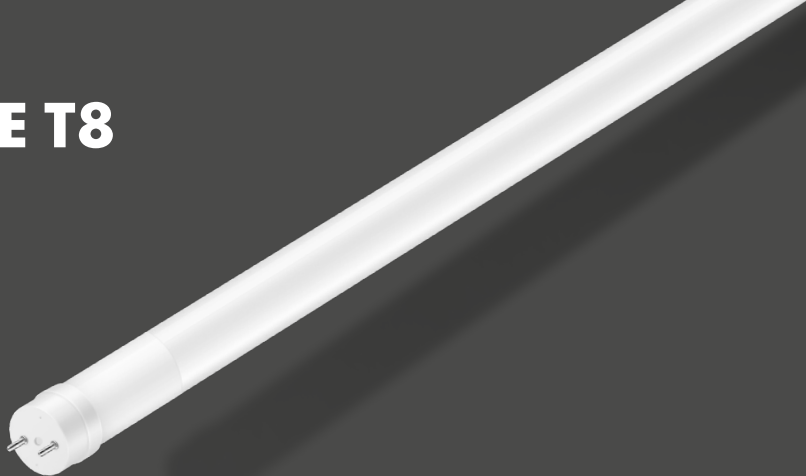

Replacement for 18W, 36W and 58W T8 TL

600mm, 1200mm and 1500mm versions

Available in 3000K, 4000K and 6500K

Versions with extra high light output (UO) available

PRODUCT	Power (W)	Lumen output (lm)	Efficiency (lm/W)	Color temperature (K)	EAN code
LEDtube 600mm 8W 840	8 W	800 lm	100 lm/W	4000 K	8710163543284
LEDtube 600mm 8W 865	8 W	800 lm	100 lm/W	6500 K	8710163543307
LEDtube 1200mm 15.5W 840	15.5 W	1.800 lm	116 lm/W	4000 K	8710163542430
LEDtube 1200mm 15.5W 865	15.5 W	1.800 lm	116 lm/W	6500 K	8710163542454
LEDtube 1200mm UO 21.5W 830 T8	21.5 W	2.250 lm	104 lm/W	3000 K	8710163543888
LEDtube 1200mm UO 21.5W 840 T8	21.5 W	2.400 lm	111 lm/W	4000 K	8710163543741
LEDtube 1200mm UO 21.5W 865 T8	21.5 W	2.400 lm	111 lm/W	6500 K	8710163543765
LEDtube 1500mm 20W 840	20 W	2.200 lm	110 lm/W	4000 K	8710163543321
LEDtube 1500mm 20W 865	20 W	3.200 lm	110 lm/W	6500 K	8710163543345
LEDtube 1500mm UO 31.5W 830 T8	31.5 W	3.500 lm	105 lm/W	3000 K	8710163543901
LEDtube 1500mm UO 31.5W 840 T8	31.5 W	3.500 lm	111 lm/W	4000 K	8710163543789
LEDtube 1500mm UO 31.5W 865 T8	31.5 W	3.500 lm	111 lm/W	6500 K	8710163543802





**MASTERING
LIGHT.**

MAZDA | I.B.R.S. / C.C.R.I. Number 10461 | 5600 VB Eindhoven, Nederland | mazedlighting.nl

© 2025 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips shield emblem are registered trademarks of Signify Holding. All other trademarks are owned by Signify Holding or their respective owners.